grecko®

LED DISPLAYS

FLOOR

SEMIOUTDOOR

LED SCREEN CABINETS

P2.5 / P2.9 / P3.9



www.greckoled.com

- **MAXIMUM DEFINITION AND HIGH PERFORMANCE**
  Led displays provide a sharp, bright and clear image in certain distances; guaranteeing a low energy consumption.

- **ADAPTABLE TO ANY SPACE**
  The modular panel system allows you to create unique displays and experiences visually stunning anywhere.

INDOOR & SEMI-OUTDOOR INFORMATION		P2.5	P2.9	P3.9
TECHNICAL SPECIFICATIONS	PIXEL PITCH	P2.5 mm	P2.9 mm	P3.9 mm
	LED ENCAPSULATION	SMD1415 LED / Kinglight	SMD1415 LED /Kinglight	SMD1921 LED / Kinglight
	MODULE RESOLUTION	100 x 100	84 x 84	64 x 64
	MODULE DIMENSIONS	250 x 250 x 18 mm / 9.8" x 9.8" x 0.7"	250 x 250 x 18 mm / 9.8" x 9.8" x 0.7"	250 x 250 x 18 mm / 9.8" x 9.8" x 0.7"
	CABINET RESOLUTION	200 x 400	168 x 336	128 x 256
	CABINET DIMENSIONS	50 x 100 x 8 cm/ 19.68"x 39.37" x 3.14"	50 x 100 x 8 cm/ 19.68"x 39.37" x 3.14"	50 x 100 x 8 cm/ 19.68"x 39.37" x 3.14"
	CONTRAST RATIO	>3,000:1	>3,000:1	>3,000:1
	BRIGHTNESS	2200 NITS	2200 NITS	2000 NITS
	MAX. AVERAGE POWER	800 / 400	800 / 400	800 / 400
POWER SUPPLY	VIEWING ANGLE	Horizontal 160°/Vertical 160°	Horizontal 160°/Vertical 160°	Horizontal 160°/Vertical 160°
	OPERATING VOLTAGE	100-240V AC 50-60 Hz	100-240V AC 50-60 Hz	100-240V AC 50-60 Hz
	REFRESH RATE	3840 hz	3840 hz	3840 hz
	CONECTORES POWER/DATA	PowerCon / EtherCon	PowerCon / EtherCon	PowerCon / EtherCon
OPTICAL RATINGS	SCAN	1/32	1/21	1/16
	IP RATING	IP65 Front / IP54 Rear	IP65 Front / IP54 Rear	IP65 Front / IP54 Rear
	CABINET WEIGHT	23 kg / 50.7 lbs	23 kg / 50.7 lbs	23 kg / 50.7 lbs
	CABINET MATERIAL	IRON	IRON	IRON
	MAX. LOAD-BEARING	2200 kgs	2200 kgs	2200 kgs

- **EASY ASSEMBLY AND INSTALLATION**
  You can assemble our LED screens in a comfortable and simple way.
  They do not require additional machinery, no complex tools.


OUTDOOR INFORMATION		P2.5	P2.9	P3.9
TECHNICAL SPECIFICATIONS	PIXEL PITCH	P2.5 mm	P2.9 mm	P3.9 mm
	LED ENCAPSULATION	SMD1415 LED / Kinglight	SMD1415 LED /Kinglight	SMD1921 LED / Kinglight
	MODULE RESOLUTION	100 x 100	84 x 84	64 x 64
	MODULE DIMENSIONS	250 x 250 x 18 mm / 9.8" x 9.8" x 0.7"	250 x 250 x 18 mm / 9.8" x 9.8" x 0.7"	250 x 250 x 18 mm / 9.8" x 9.8" x 0.7"
	CABINET RESOLUTION	200 x 400	168 x 336	128 x 256
	CABINET DIMENSIONS	50 x 100 x 8 cm/ 19.68"x 39.37" x 3.14"	50 x 100 x 8 cm/ 19.68"x 39.37" x 3.14"	50 x 100 x 8 cm/ 19.68"x 39.37" x 3.14"
	CONTRAST RATIO	>3,000:1	>3,000:1	>3,000:1
	BRIGHTNESS	2200 NITS	2000 NITS	2000 NITS
	MAX. AVERAGE POWER	800 / 400	800 / 400	800 / 400
POWER SUPPLY	VIEWING ANGLE	Horizontal 160°/Vertical 160°	Horizontal 160°/Vertical 160°	Horizontal 160°/Vertical 160°
	OPERATING VOLTAGE	100-240V AC 50-60 Hz	100-240V AC 50-60 Hz	100-240V AC 50-60 Hz
	REFRESH RATE	3840 hz	3840 hz	3840 hz
	CONECTORES POWER/DATA	PowerCon / EtherCon	PowerCon / EtherCon	PowerCon / EtherCon
OPTICAL RATINGS	SCAN	1/32	1/21	1/16
	IP RATING	IP65 Front / IP54 Rear	IP65 Front / IP54 Rear	IP65 Front / IP54 Rear
	CABINET WEIGHT	23 kg / 50.7 lbs	23 kg / 50.7 lbs	23 kg / 50.7 lbs
	CABINET MATERIAL	IRON	IRON	IRON
	MAX. LOAD-BEARING	2200 kgs	2200 kgs	2200 kgs


grecko LED DISPLAYS

CABINET VIEW

6x2
Floor screen cabinets.



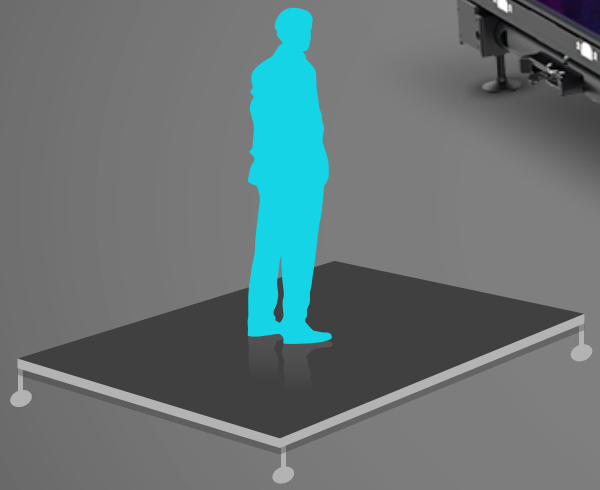

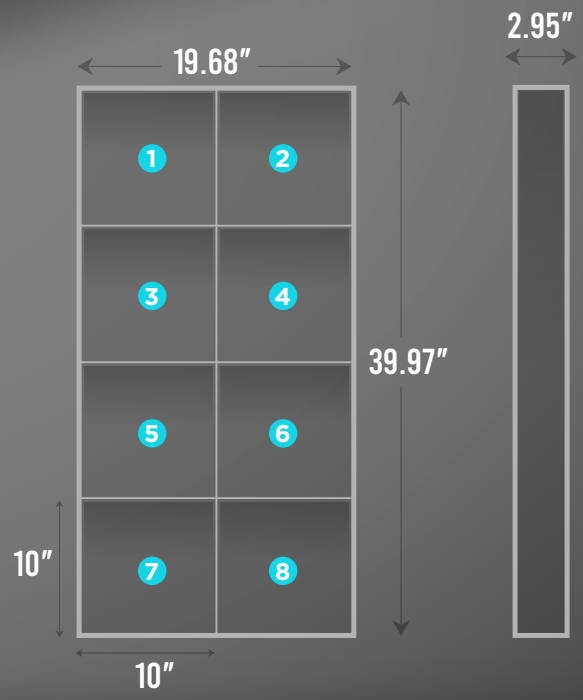

PIXEL DENSITY

Is the total number of led lamps per m2 of each screen model.

P2.5 **160.000** pixel/m²
P2.9 **112.896** pixel/m²
P3.9 **65.536** pixel/m²

GENERAL SPECIFICATIONS

- MATERIAL Die-Casting aluminum
- SIZES 19.68″ x 39.97″ x 2.95″
- WEIGHT 23 kgs / 50.27 lbs



www.greckoled.com
instagram.com/greckoled/
info@greckoled.com